


EV12140C(12V140Ah)

Specifications


Rated Voltage	12V	
Rated Capacity	20HR	144.0 Ah
	10HR	138.0 Ah
	5HR	126.0 Ah
	3HR	120.0 Ah
Dimension L*W*H*TH	405.5*170.5*243*243 mm 15.96*6.71*9.57*9.57 inches	
Weight	40.6 kg(89.5 lbs)	
Container Material	ABS	
Reserve Capacity	25A	321min
	56A	126min
Terminal	M8	
Operating Temp.Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)




Layout

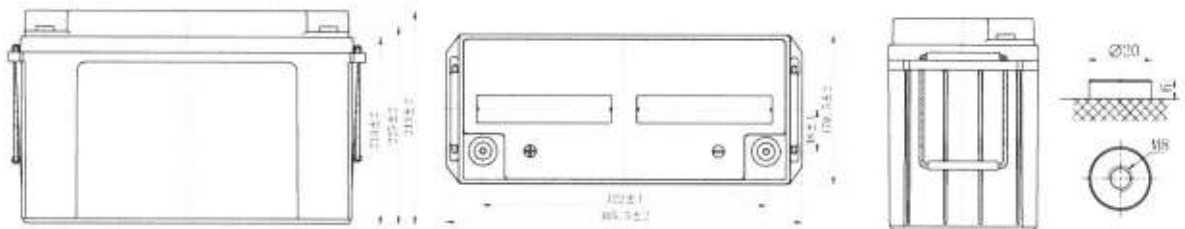

Charging Characteristics

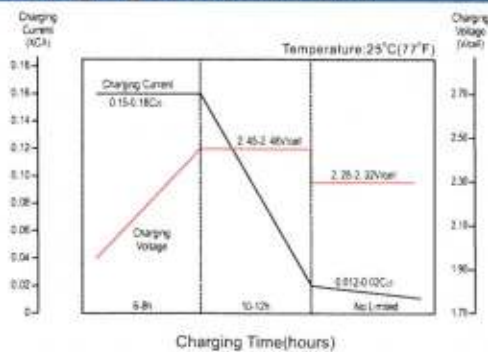

Cycle Life in Relation to Depth of Discharge

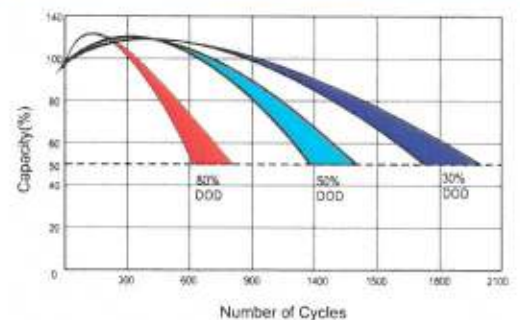


EV1226(12V26Ah)

Specifications


Rated Voltage	12V	
Rated Capacity	20HR	26.0 Ah
	10HR	25.0 Ah
	5HR	24.0 Ah
	3HR	23.0 Ah
Dimension L*W*H*TH	181*76.5*171*171 mm 7.13*3.01*6.73*6.73 inches	
Weight	6.85 kg (15.1 lbs)	
Container Material	ABS	
Reserve Capacity	26A	/
	56A	/
Terminal	M5	
Operating Temp. Range	Discharge	-15 ~ 50°C (5 ~ 122°F)
	Charge	0 ~ 40°C (32 ~ 104°F)
	Storage	-15 ~ 40°C (5 ~ 104°F)



Layout

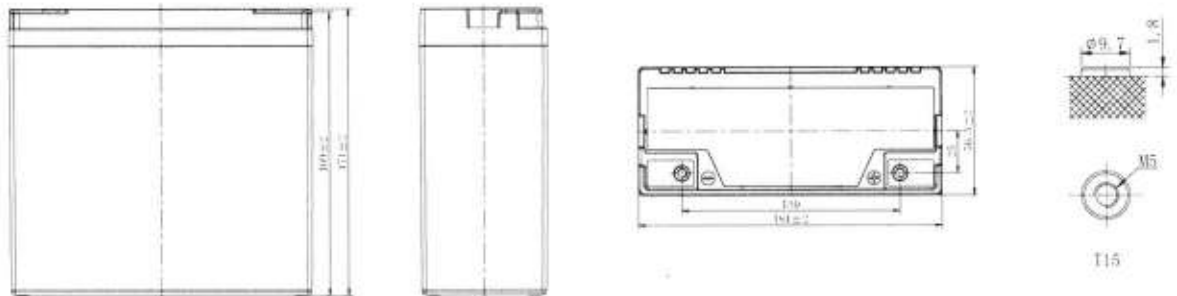

Charging Characteristics

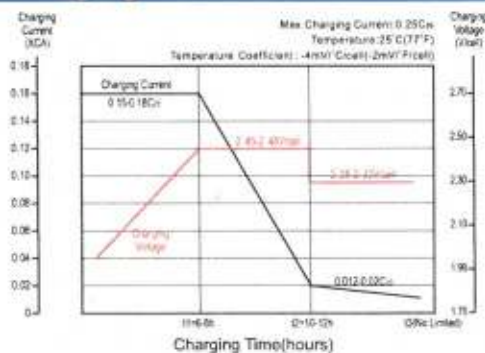

Cycle Life in Relation to Depth of Discharge

